



AIR BOOSTER

603


Water-Based / Sealants / Xylene / Form Oil
Bleach / Graffiti Removing

Instruction Manual


INDEX

Index	1
Unpacking	2 - 3
Specifications	4
Important Product Note	5
General Warnings	6 - 7
Battery Safety	8 - 9
Charging Information	10 - 11
Preparing the Air Booster for Operation	12 - 15
Spraying Flammable Liquid (4 steps)	16 - 19
Maintenance	20
Nozzle & Performance	21
Replacement Parts - Diagram A	22
Replacement Parts - Diagram B	23
Replacement Parts - List	24
Notes	25
Return Instructions	26
Warranty Info	27


UNPACKING

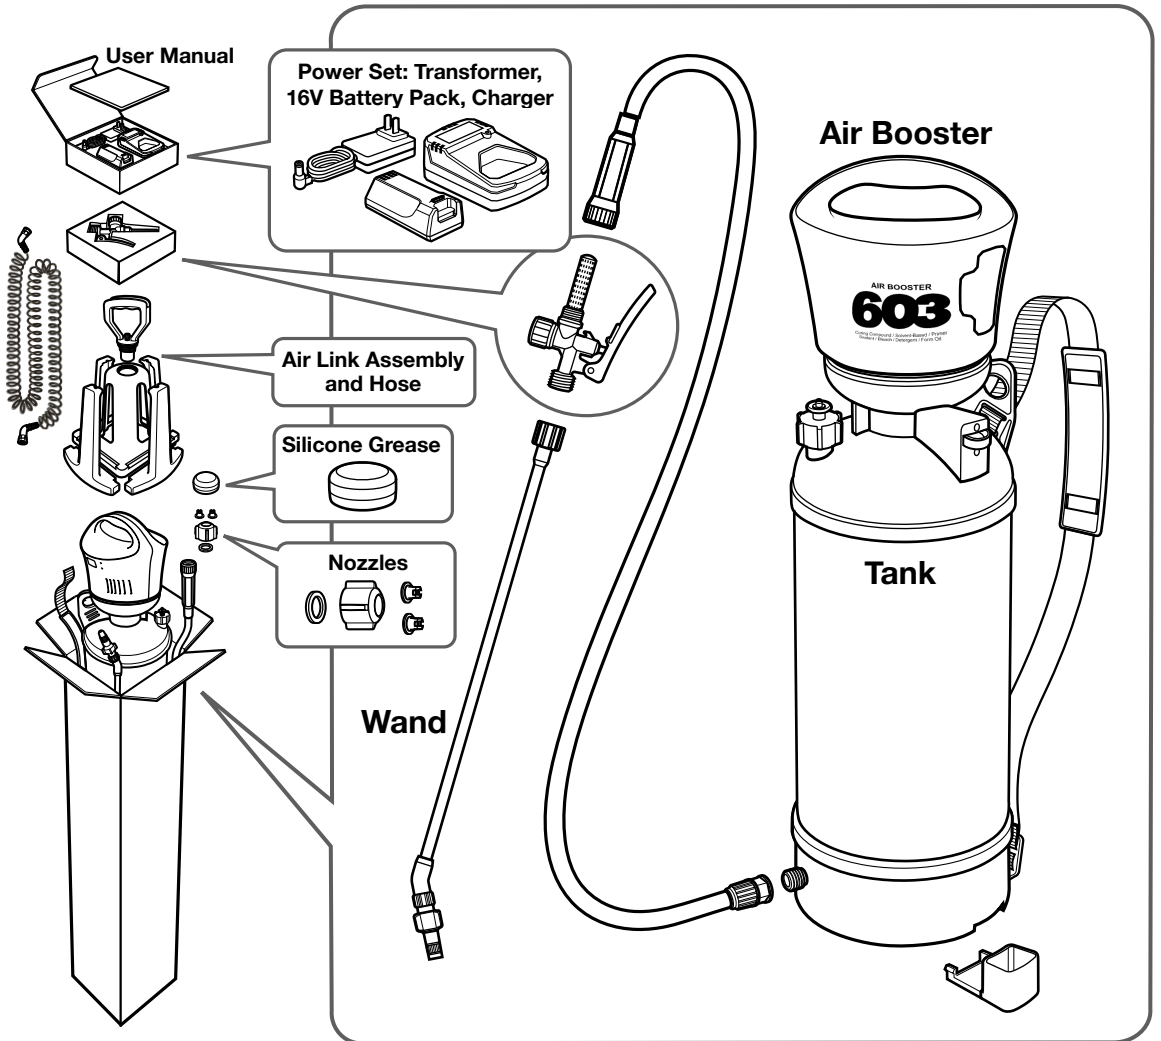

UNPACKING CONT'D

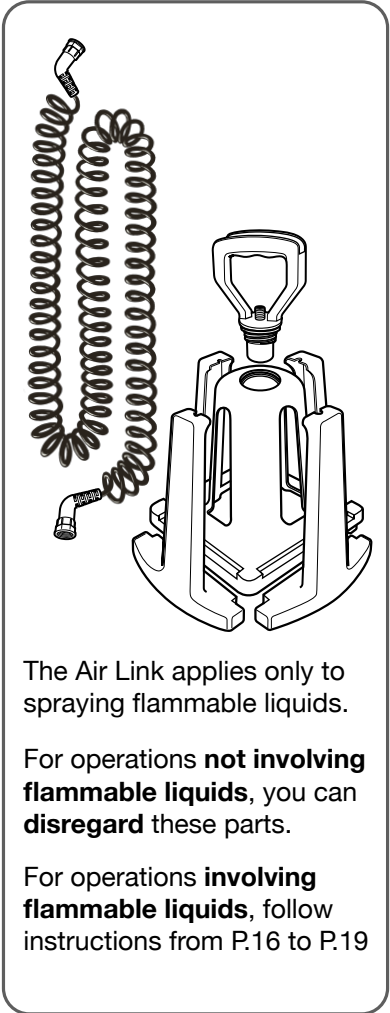

Securely tighten the 6 locations indicated below to prevent leakage

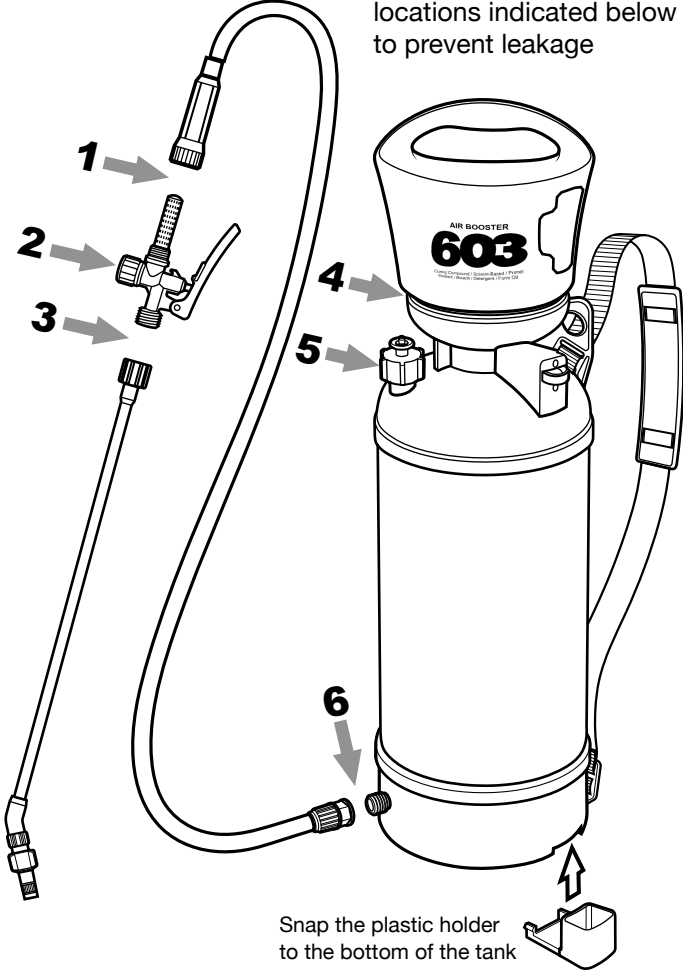

SPECIFICATIONS

Target Market	Industrial Construction
Power	16V Lithium Battery
Engineered to Spray	Water-Based / Sealants / Xylene / Form Oil Bleach / Graffiti Removing
Number of Tanks of Liquid Sprayed per Charge	Up to 16 tanks (mist Spraying @ 16PSI)
Capacity - US Gallons (Litres)	2 (7.6)
Dry Weight - lbs (kg)	7.5 (3.41)
Seals & O-rings	Viton ^R
Spray Gun	SprayersPlus™ with Lock Pin & Filter
Wand	20" Brass
Hose	51" Polyethylene (Clear)
Pressure Range - PSI	16 - 32
Nozzles	
Standard Nozzle (plastic)	Adjustable Stream / Mist Nozzle
Fan Nozzle A (plastic)	90°
Fan Nozzle B (plastic)	110°
Shoulder Strap	Adjustable Length
Mouth Opening - inch	5.24" QuickFill
Pump Type	Powered Compression Pump
Warranty	1 Year

IMPORTANT PRODUCT NOTE

SprayersPlus produces top quality products meeting the highest standards in the industry.

To ensure your safety, optimize the user experience and maximize the life span of this product, it is of utmost importance to follow the product instructions, as well as the DOs and DON'Ts outlined in the operation and maintenance procedures of this manual.

Please read this manual thoroughly and follow carefully

USING AIRLINK AND SPRAYING FLAMMABLE LIQUIDS

Some models of our Air Boosters are capable of handling flammable liquids when they are used with the **AirLink**, our special attachment.

These models allow the Air Booster to operate and at a safe distance from the tank and any flammable liquid or fume it contains.

Such models can safely contain non-flammable liquids as well.

To operate safely, user must follow all instructions carefully.

ONLY use those models specifically designated as being capable of containing and handling flammable liquids. Carefully follow all outlines and proper procedures when setting up the Sprayer Plus Air Booster 603 to work with flammable liquids.

Do Not spray flammable liquids unless using the proper settings.

Warning: spraying flammable liquids too close to the motor or the battery, or operating with improper settings lead to imminently hazardous situation which, if not avoided will result in death or serious injury.

IMPORTANT: Depressurize the unit if it will not be used for more than 30 minutes.

This action helps reduce continuous stress on the tank, hose, and seals, thereby prolonging the life of your sprayer.

Contact us if you have any question or concern:
info@sprayers-plus.com

GENERAL WARNINGS

SAFETY GUIDELINES - DEFINITIONS

It is important for you to read and understand this manual.

The information contains relates to protecting YOUR SAFETY and PREVENTING PROBLEMS.

The symbols below are used to help you recognize this information.



DANGER!

Indicates an imminently hazardous situation which, if not avoided will result in death or serious injury.



WARNING!

Indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.



CAUTION!

Indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury.

GENERAL WARNINGS

CONT'D

WARNING!

IMPROPER USE OR FAILURE TO FOLLOW INSTRUCTIONS CAN RESULT IN EXPLOSION CAUSING SERIOUS EYE OR OTHER INJURIES.

FOR THE SAFE USE OF THIS SPRAYER, YOU MUST READ AND FOLLOW ALL INSTRUCTIONS.

- Do not leave a pressurized sprayer in the hot sun. Heat can cause pressure to build up, resulting in possible explosion.
- Do not store or leave solution in the tank after use. Always wear goggles, gloves, long sleeve shirt, long pants and full foot protection while spraying.
- Do not attempt to modify this sprayer. Replace parts only with manufacturer's original parts.
- Flammable, caustic, acidic, chlorine, bleach or other corrosive solutions must not be used unless you are using the type of tank, hose, seals and accessories with the specifications designated to handle the specific chemical. Always read and follow manufacturer's instructions before using this sprayer because some chemicals may be incompatible and hazardous when used with this sprayer.
- Handling the brass parts of this product will expose you to a chemical known to the state of California to cause birth defects or other reproductive harm.
- **Wash hands after handling.**

CAUTION!

- **PRE-USE CHECK:** Before each use, check the tightness of the hose to ensure the hose is securely attached to the shut-off assembly. Ensure that all nozzles and wand connections are tight.
- Do not exceed a tank solution temperature of 120°F/49°C.

NOTE: Residual water may be accumulated in the tank and hose during factory quality and performance testing.

BATTERY SAFETY

SprayerPlus sprayers are designed to operate with a 16V lithium-ion battery by SprayersPlus.

CAUTION - OTHER BATTERIES

Use of any other batteries with the sprayer may cause serious harm or injury to the operator and serious damage to the sprayer.

The battery pack does not come fully charged out of the box.

Before operating the battery pack and charger, **Read the safety instructions and follow the charging procedures outlined on page 8.**

POWER BATTERY
Li-ion 16V 2.2Ah/35.2wh

WARNING

To reduce the risk of fire or burns, do not disassemble, crush, puncture or short external contacts.



WARNING - SHOCK HAZARD

Do not allow any liquid to get inside the charger. Never attempt to open the battery pack or the charger for any reason. If the plastic housing of the battery pack breaks or cracks, return it to a service centre for recycling.

IMPORTANT SAFETY INSTRUCTIONS FOR BATTERY PACKS

Explosive Atmospheres: Do not charge or use battery in explosive atmospheres, such as in the presence of flammable liquids, gases or dust. Inserting or removing the battery from the charger may ignite the dust or fumes.

Damaged Battery: Do not incinerate the battery pack even if it is severely damaged or is completely worn out. The battery pack can explode if exposed to flames or high heat. Toxic fumes and materials are created when battery packs are burned.

Battery Contents Leak:

The battery electrolyte for lithium-ion batteries is composed of a mixture of liquid organic carbonates and lithium salts.

- **Burn hazard.** Battery liquid may be flammable if exposed to sparks or flames.
- **Contents of opened battery cells** may cause respiratory irritation. If respiratory irritation is experienced due to exposure, move person to a well-ventilated area immediately. If symptoms persist, seek medical attention.
- **If battery contents come into contact with skin,** immediately wash area with mild soap and water.
- **If battery liquid gets into the eye,** rinse water over the open eye for 15 minutes or until irritation ceases. If medical attention is needed, see a doctor immediately.

BATTERY SAFETY

CONT'D

WARNING - GENERAL

Charging: Charge the battery packs only in SprayersPlus chargers.

DO NOT splash or immerse in water or other liquids. This may cause premature cell failure.

Operation Temperature: DO NOT store or use the tool and battery pack in locations where the temperature may reach or exceed 105°F (40°C) (such as outdoor sheds or metal buildings in the summer season).

Never attempt to open the battery pack for any reason. If the battery pack casing is cracked or damaged, do not insert it into the charger.

Do not crush, drop or damage the battery pack.

Damaged battery pack or charger: DO NOT use a battery pack or charger that has received a sharp blow, been dropped, run over or damaged in any way.

Damaged battery packs should be returned to a service center for recycling.

WARNING - STORAGE AND TRANSPORT

Fire hazard: Do not store or carry the battery in such a way that metal objects can come in contact with exposed battery terminals. For example, do not place the battery in aprons, pockets, toolboxes, product kit boxes, drawers, etc.

Protect and insulate battery terminal: To prevent fire risk while transporting batteries, ensure battery terminals do not come in contact with conductive materials such as keys, coins, hand tools and the like; make sure that the battery terminals are protected and well insulated from materials that could contact them and cause a short circuit.

Airplane luggage: The US Department of Transportation's Hazardous Material Regulations (HMR) prohibits the transport of lithium-ion batteries in commerce or on airplanes (i.e., packed in suitcases and carry-on luggage) UNLESS they have proper short-circuit protection.

NOTE: Lithium- ion batteries should NOT be put in checked baggage.

Regulations of other countries may be different. Please check with your airline.

WARNING - BATTERY CHARGER

Shock hazard: Do not allow any liquid to get inside the charger. Do not expose the charger to rain or snow.

Do not attempt to charge the battery pack with any chargers other than the ones specified in this manual. The charger and battery pack are specifically designed to work together.

These chargers are not intended for any uses other than charging rechargeable batteries. Any other uses may result in risk of fire or electrocution.


CHARGING INFORMATION

CHARGING PROCEDURE

Sprayers Plus chargers are designed to charge Sprayers Plus 16V battery packs only. Follow these steps to charge the SprayersPlus battery pack:


1. Plug the charger into an appropriate outlet before inserting the Sprayers Plus 16V battery pack.

A flashing red light indicates the charger is active and ready to operate.

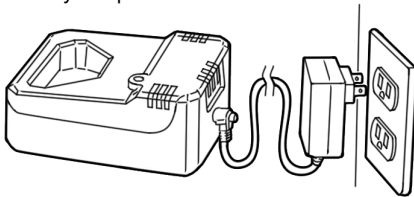

Note: If the charger does not activate, refer to page 18 Troubleshooting.

2. Insert the battery pack into the charger.
3. A solid red light indicates the battery is charging.
4. When the solid red light changes to a solid green light, the battery is fully charged.




Note: Any light behaviour (such as rapid flashing), other than solid red (charging) or a solid green (charged) indicates a charging error. Refer to page 18 Troubleshooting or contact SprayersPlus for further advice.

BATTERY POWER INDICATOR LIGHTS


- There are 3 LED lights on the battery.

Press the adjacent button to inspect the power level.

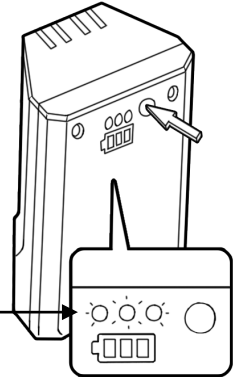

- Three blue lights indicate fully charged.

- One blue light indicates the battery level is low. It is time to recharge.



LEAVING THE BATTERY IN THE CHARGER

The charger and battery pack can be left connected with the solid green LED light on. The charger will automatically keep the battery pack fresh and fully charged.

STORAGE RECOMMENDATIONS

Store the charger and battery in cool and dry places; keep them away from direct sunlight and excess heat or extreme low temperature. Storage up to 3 months will not harm a fully charged battery pack or charger.

CHARGING INFORMATION

CONT'D

IMPORTANT CHARGING NOTES

Follow the Charging Procedure detailed on the previous page of this manual to recharge the battery.

The battery pack should be recharged whenever it fails to produce sufficient power on jobs that were previously easy to complete. DO NOT CONTINUE with use under such condition.

You may charge a used battery pack when ever you desire with no adverse effect to the battery pack.

Foreign materials of a conductive nature, such as steel wool, aluminum foil, buildup metallic particles, etc., should be kept away from charger cavities.

Always unplug the charger from the power supply when there is no battery pack in the cavity. Unplug charger before attempting to clean.

Do not freeze or immerse charger in water or any other liquid.

The longest life and best performance of the battery pack, charge it in an environment where the air temperature is between 65°F and 75°F (18°C-24°C).

Charging Temperature: DO NOT charge the battery pack in an environment where the air temperature is below 40°F (+4.5°C), or above +105°F (+40.5°C). Follow these guidelines to prevent serious damage to the battery pack.

The charger and battery pack may become warm while charging. This is normal and does not indicate a problem.

To facilitate the cooling of the battery pack after use, avoid placing the charger or battery pack in a warm environment such as in a metal shed or an uninsulated trailer.

If the battery pack does not charge properly, follow these steps:

- (1) Check current at the outlet or receptacle by plugging in a lamp or other appliance.
- (2) Check to see if outlet or receptacle is connected to a light switch which turns the power off when you turn off the lights.
- (3) Move charger and battery pack to a location where the surrounding air temperature is between approximately 65°F and 75°F (18°C-24°C)
- (4) If charging problems persist, take the tool, battery pack and charger to your local service center.

Always charge the battery after use to maximize the life of the battery.

Leaving a drained lithium ion battery in storage for too long may cause it to fail to recharge.

PREPARING THE AIR BOOSTER FOR OPERATION

PRESSURE ADJUSTMENT

The SprayersPlus Air Booster automatically pressurizes the tank to provide continuous reliable air pressure for spraying and is preset at the factory for optimal pressure at 28 psi.

It can be adjusted by an adjustment lever located in the inner drum of the Air Booster. Moving this lever left or right according to the + or - sign adjusts the sensor inside the tank to increase or decrease the maximum pressure threshold.


Once the pressure in the tank reaches your designated setting, the pump will stop. It will automatically restart again when the pressure drops below a pre-set minimum pressure threshold.

After using the Air Booster once, you can determine if the maximum pressure threshold needs adjustment.

If the original factory setting works well for you, there is no need to do any adjustment.


If you want to adjust the maximum pressure in the tank, follow these steps:

1. Turn off the AirBooster.
2. Pull the safety pressure valve relief until the tank is fully depressurized.
3. Unscrew the Air Booster from the tank.
4. Adjust the pressure adjustment lever accordingly.
5. Reinstall the Air Booster to test if the new setting is satisfactory. If the pressure still needs to be adjusted, repeat step 1 to 5.

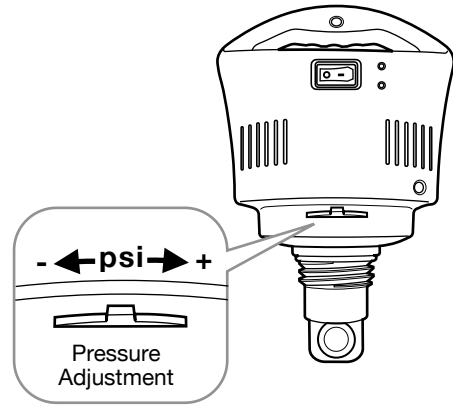

PREPARING THE AIR BOOSTER FOR OPERATION

CONT'D

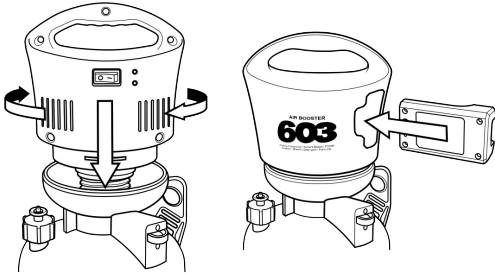

1. Tightly screw and thereby seal the Air Booster onto the canister tank.
2. Insert the battery into the battery slot.
3. Switch power to ON with illuminated red main switch.
4. Listen to detect sound of motor pressurizing the tank.
5. When pressure in the tank reaches the preset pressure, the motor stops and **green LED illuminates** to indicate the sprayer is ready to use.

User can adjust and set the operating pressure between 16 to 32 PSI. (see p.10)


The Air Booster automatically starts itself when the pressure drops below the preset reading. During the pressurization process, the green light will temporarily turn off.

Ensure that the Air Booster is securely and tightly screwed to the canister tank and the pressure release valve is seated in place.

In normal circumstances, a 2 gallon tank can be fully pressurized under 2 minutes.

Due to safety reasons, the motor shuts off if pressurizing continues for more than 2 minutes and a **blue LED will illuminate**. If it happens, restart it after 5 minutes.

If the restart fails, it is possible there is an air leakage or a sensor malfunction. Refer to page 18 Troubleshooting or contact SprayersPlus for further advice.

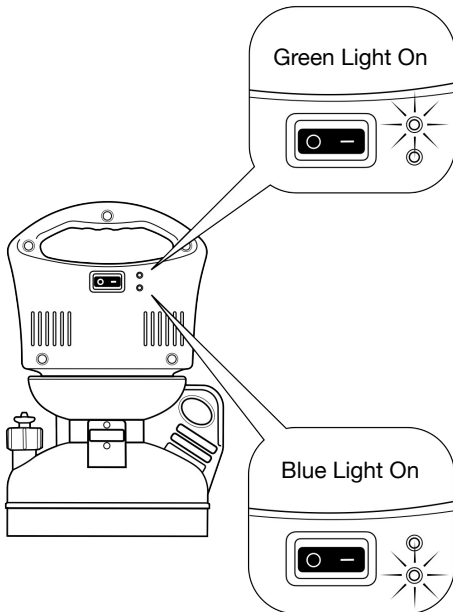

To restart, turn the unit off for 10 seconds and switch it back on. The system will return to normal.

To depressurize, pull out the safety pressure valve relief until all air has been released from the tank. Then let go the pulling action and the valve will reset to the default sealing position.

PREPARATION FOR SPRAYING

WEAR PROTECTIVE GEAR



Follow Occupational Health and Safety regulation.

Wearing protective clothing and equipment when handling chemicals is obligatory.

⚠ WARNING:

Use the correct dose and volume of chemical according to the product label.

⚠ WARNING:

Do not spray near springs, lakes, rivers and people who are not using PPE.


⚠ WARNING:

In case of an accident, remove the sprayer immediately.

PREPARATION FOR SPRAYING

CONT'D

WAND PLACEMENT

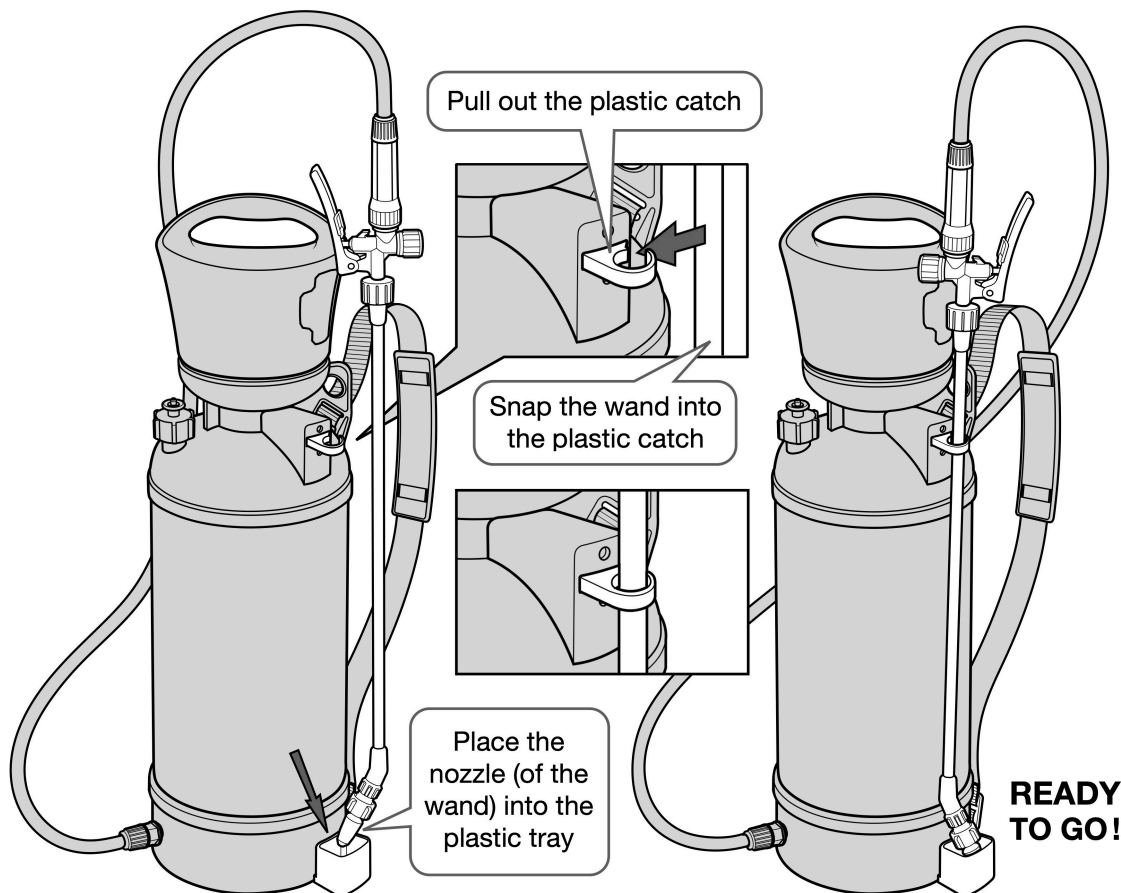

SPRAYING FLAMMABLE LIQUID (STEP 1 OF 4)

Note: These steps apply only to **spraying flammable liquids**. For operations not involving flammable liquids, these steps can be skipped and the operator can proceed with spraying and maintenance and cleaning of the sprayer.

STEP-1 PREPARATION

INTRODUCTION

To spray flammable liquids safely, **the spraying operation (and the tank) must be separated** from any motor or battery which may potentially produce spark or heat up to ignite the fume or the liquid.

The Air Link is designed for such operation. It has a base which stores a long hose to pressurize the tank.

The Air Link base (with the Air Booster Head installed) can be placed a safe distance from the tank and the spraying operation.


Carefully follow steps 1-4 on this page to assemble the Air Link base and install the Air Booster Head onto it safely.

Note: **Safe Operating Distance** may vary in different situations. To ensure safety, measure the concentration of the flammable vapour with appropriate equipment and make sure the operating distance is substantial enough to keep the flammable vapour below ignition level according to the specifications of the flammable liquid.


ASSEMBLING OF THE AIRLINK BASE

1.1 to 1.3 only need to be done once (when you take the parts straight out of the box).


1.1 Install hose to the designated opening on the Air Link base.




1.2 Snap the four arms gently to the base and make sure they are tightly attached.



1.3 Wrap the hose into the designated space.



1.4 Remove the Air Booster Head from the tank and install it onto the Air Link base.

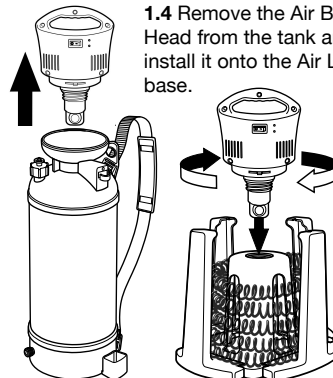


SPRAYING FLAMMABLE LIQUID (STEP 2 OF 4)


Note: These steps apply only to **spraying flammable liquids**. For operations not involving flammable liquids, these steps can be skipped and the operator can proceed with spraying and maintenance and cleaning of the sprayer.

STEP-2 FILL THE TANK AND FASTEN THE HOSE

2.1: Fill the tank

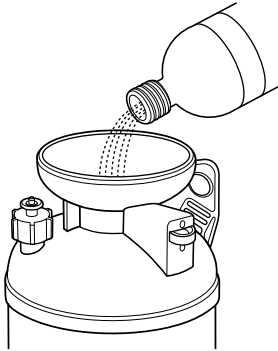

2.2: Install the cap





Fill the tank gradually with the solvent and clean any spilled liquid. Install the cap (from the Air Link Base) onto the tank.

⚠ DANGER!


Fire Hazard! Keep out from spark or open fire!

Handle the flammable liquid according to its specifications and OCCUPATION HEALTH AND SAFETY REGULATION.

2.3 Keep the Air Booster in a separate room and/or at a safe distance from the tank.



2.4 Attach the hose to the tank

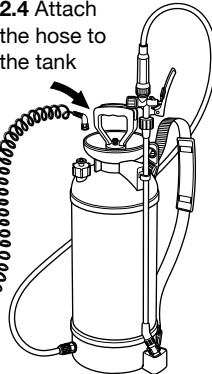

⚠ DANGER!

Fire Hazard! Do not spray flammable liquid when the Air Booster is close by.


The flammable liquid and fume may be ignited (by sparks produced by the motor or battery of the Air Booster) and cause serious injury.

Leave the tank in a separate room or at a safe distance before fastening the hose onto the tank.

SPRAYING FLAMMABLE LIQUID (STEP 3 OF 4)

Note: These steps apply only to **spraying flammable liquids**. For operations not involving flammable liquids, these steps can be skipped and the operator can proceed with spraying and maintenance and cleaning of the sprayer.


STEP-3 START SPRAYING

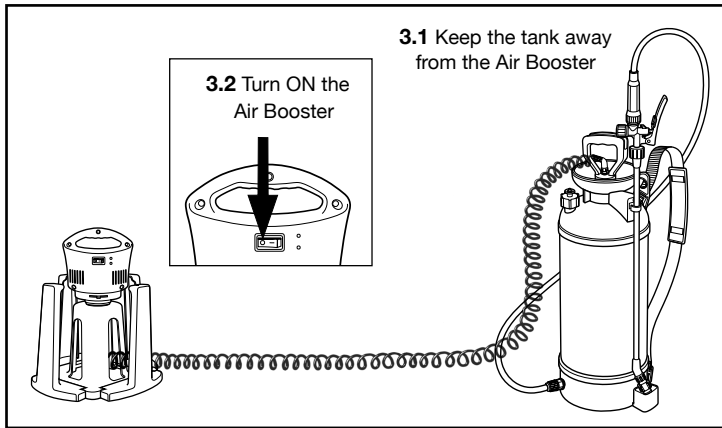

SAFETY FIRST!

DO NOT turn on the AirLink until it is separated and a safe distance away from the operation (and the tank).

Keeping it in an adjacent room is a good way to eliminate the potential risks of igniting inflammable vapour.

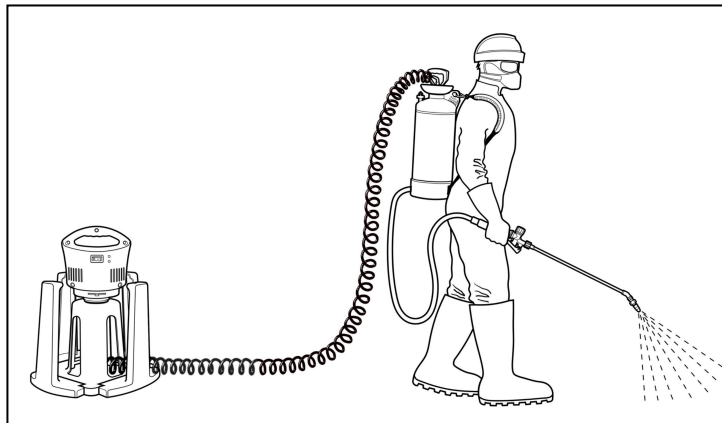

Wear proper protective gear and start spraying.

DO NOT bring the tank near the Air Link with the Booster.


While operating, always keep the tank at a safe distance from the Air Link with Air Booster. Operate in separate rooms wherever possible.

SPRAYING FLAMMABLE LIQUID (STEP 4 OF 4)

Note: These steps apply only to **spraying flammable liquids**. If not using the Air Link base, proceed with spraying and maintenance and cleaning of the sprayer.

Step-4 Finishing Up

Carefully follow steps 4.1 to 4.4 on this page to safely turn off the Air Booster and empty the tank

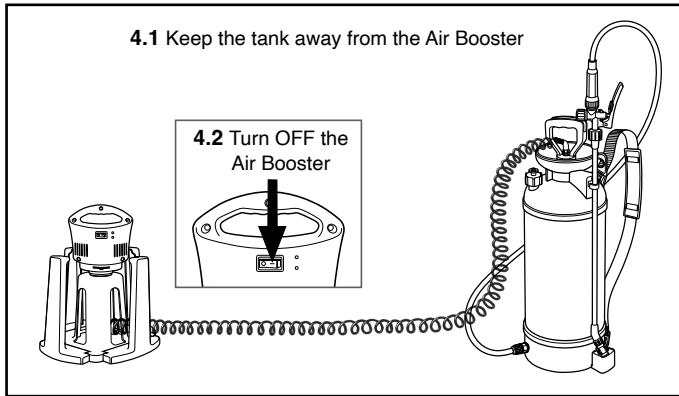


Turning off the Air Booster

SAFETY FIRST!


DO NOT take the tank with you.

Leave the tank (in the adjacent room or at a safe distance) and go to turn off the Air Booster on the Air Link.

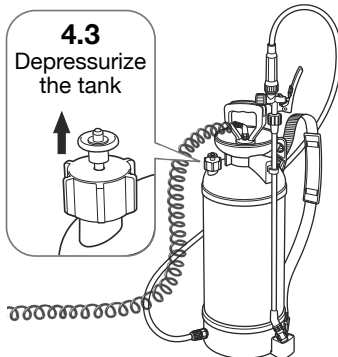

Emptying the Tank


1. Pull the safety pressure valve relief until the tank is fully depressurized.
2. Unscrew the hose.
3. Take the tank to dispose the liquid inside, and then clean the tank and perform maintenance.

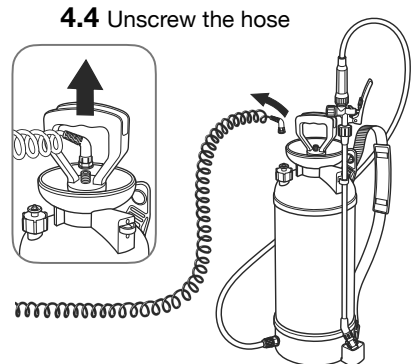

MAINTENANCE AND CLEANING

Upon finishing the spraying operation, perform these procedures to prepare the sprayer for cleaning and lubrication.


1. Turn off the Air Booster.
2. Depressurize the tank.
3. Unscrew the Air Booster to remove it, and then dispose of the residue in the tank.

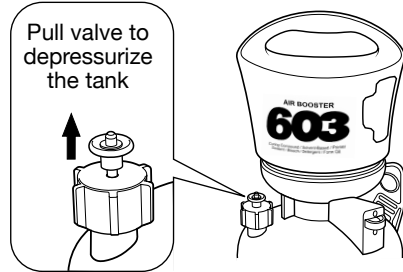

Clean and Wash


Using a brush, clean the sprayer thoroughly at the points indicated after each use.

Soap can be added to the water for a better cleaning result.

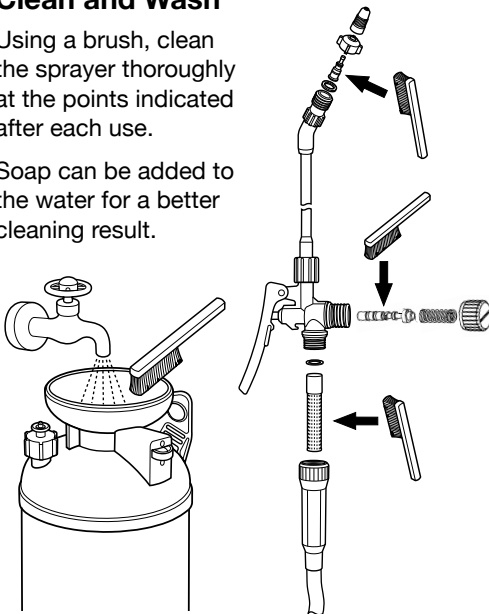





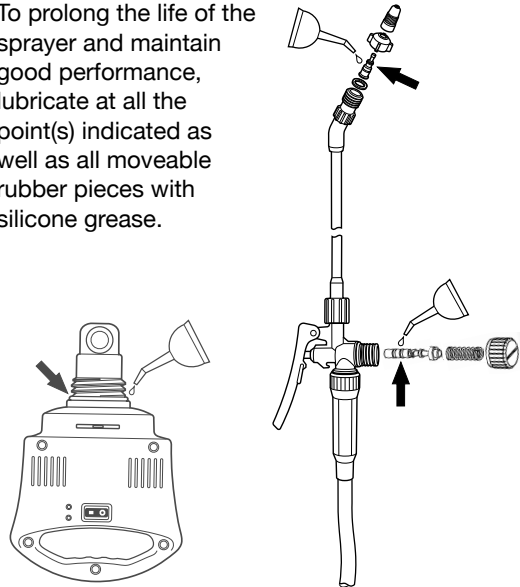

Rubber Seal Protection & Lubrication


To prolong the life of the sprayer and maintain good performance, lubricate at all the point(s) indicated as well as all moveable rubber pieces with silicone grease.



NOZZLE & PERFORMANCE


Type	Sprayer Models	Pressure (psi/kg)	Mist setting output (ml/min) +/- 100ml	Coverage @ 3.3' height (feet)	Steam setting output (ml/min) +/- 100ml	Steam setting Horizontal reach (feet)
 Brass Cone 1.3mm Orifice	100, 101, 103, 201, 202, 401, 402	40/2.8	700	3.9' x 3.9'	1100	33'
	CR275, LC275, YT10, YT20, YT30, 20C, 35C, PS20	32/2.16	500	2.5' x 2.5'	900	32'
	105EX	40/2.8	800	3.9' x 3.9'	1150	35'
	YT25	32/2.16	500	2.5' x 2.5'	900	32'
	603	32/2.16	500	2.5' x 2.5'	900	32'
 Black Cone 1.5mm Orifice	301, 302, 403	32/2.16	580	3.9' x 3.9'	1520	32'
	10ACID, 20ACID, 20ACT, 35ACT, FH10, FH20, FH30, BL20, AD275, AT275	32/2.16	580	3.9' x 3.9'	1520	32"
	601	32/2.16	520	3.9' x 3.9'	1450	32"
	701, 703	32/2.16	430	3.6' x 3.6'	730	16"
	801, 802, 803	n/a	230 +/- 10ml (2.8ml/puff)	3.9' x 3.9'	360 +/- 10ml (3.4ml/puff)	25"
 Black Cone 1.0mm Orifice	BL25E, FH25E	32/2.16	440	3.6' x 3.6'	730	31"
 02 Yellow Fan 90°	100, 101, 103, 201, 202, 301, 302, 401, 402, 403,	40/2.8	1000	n/a	n/a	n/a
	CR275, LC275, AD275, AT275, 20C, 35C, 10ACID, 20ACID, 20ACT, 35ACT, BL20, PS20, YT10 YT20, YT30, FH10, FH20, FH30	32/2.16	850	n/a	n/a	n/a
	BL25E, FH25E, YT25E	32/2.16	680	n/a	n/a	n/a
	601, 603	32/2.16	750	n/a	n/a	n/a
	801, 802, 803	n/a	260 +/- 10ml (2.3ml/puff)	n/a	n/a	n/a
 03 Blue Fan 110°	100, 101, 103, 201, 202, 301, 302, 401, 402, 403,	40/2.8	1150	n/a	n/a	n/a
	CR275, LC275, AD275, AT275, 20C, 35C, 10ACID, 20ACID, 20ACT, 35ACT, BL20, PS20, YT10 YT20, YT30, FH10, FH20, FH30	32/2.16	1450	n/a	n/a	n/a
	105Ex	40/2.8	1350	n/a	n/a	n/a
	BL25E, FH25E, YT25E	32/2.16	1200	n/a	n/a	n/a
	601, 603	32/2.16	1300	n/a	n/a	n/a
	801, 802, 803	n/a	340 +/- 10ml (3.3ml/puff)	n/a	n/a	n/a
 04 Gray Fan 135°	105E, 105Ex	40/2.8	1620	n/a	n/a	n/a

REPLACEMENT PARTS - DIAGRAM A

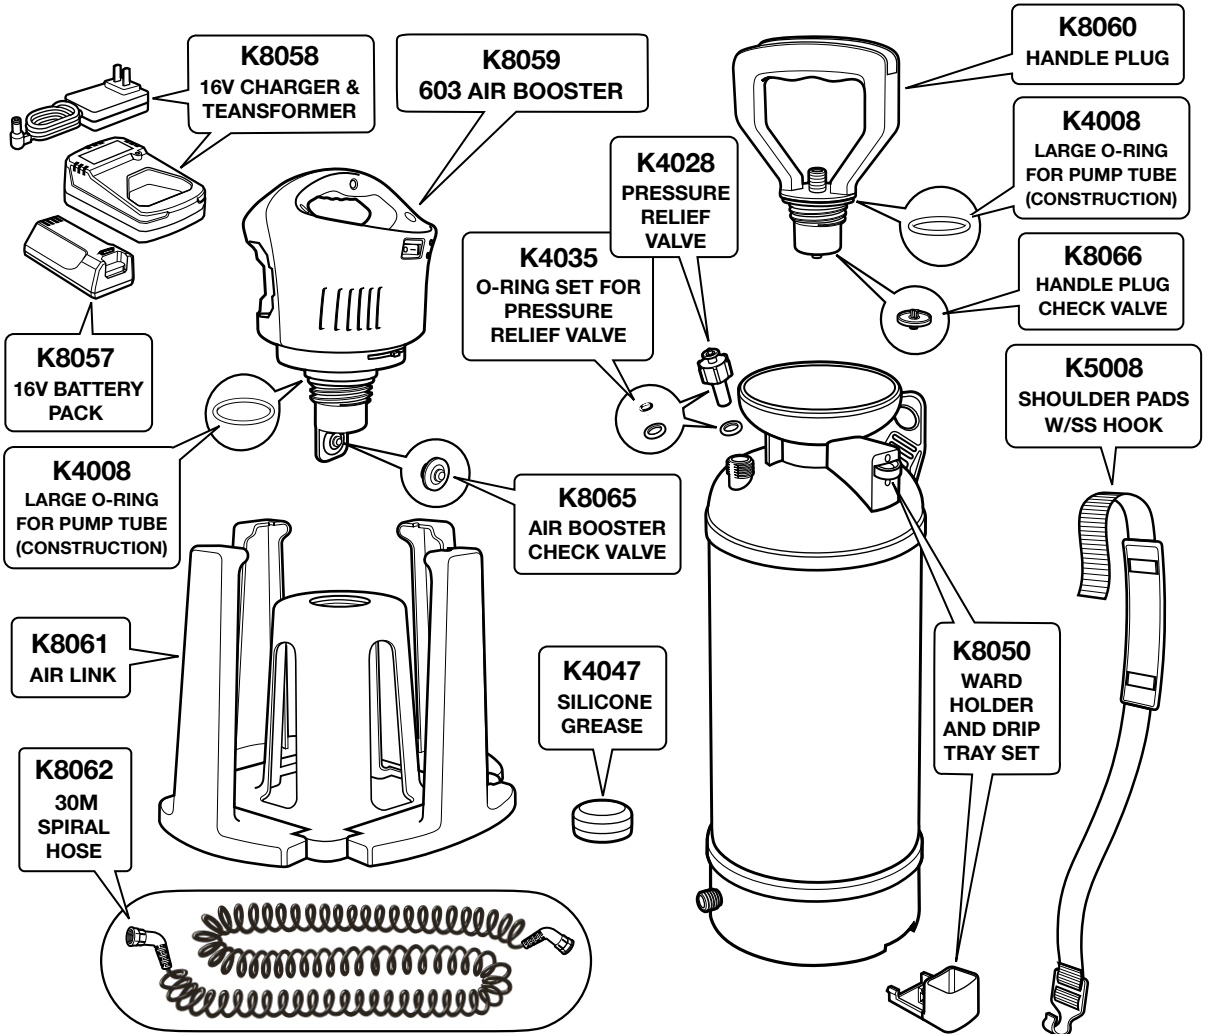

REPLACEMENT PARTS - DIAGRAM B

HOSE, WAND AND O-RINGS

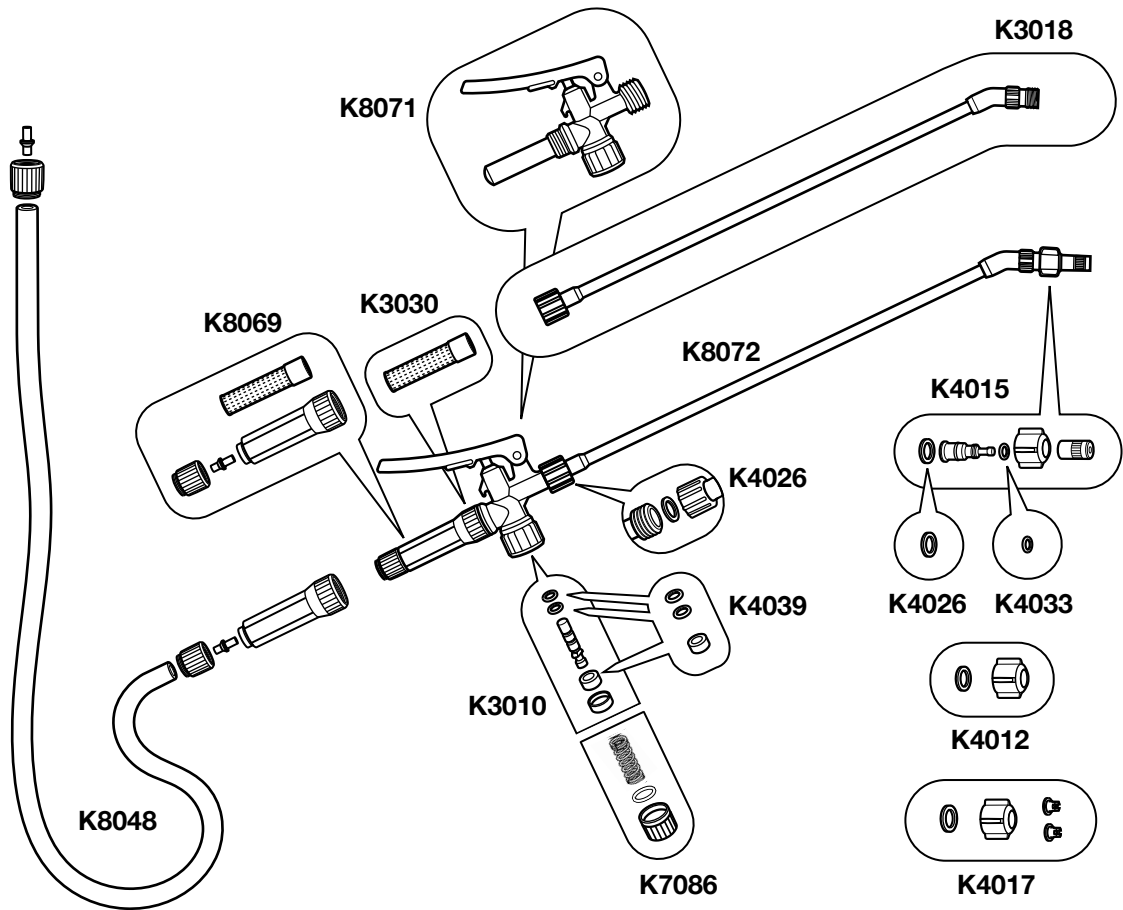

REPLACEMENT PARTS - LIST

K3010	BRASS SPINDLE SET	K5008	SHOULDER STRAP W/SS HOOK
K3018	BRASS SPRAY WAND - 20"	K7086	PLUG SET - SPRAY GUN
K3030	SPRAY GUN FILTER	K8048	PE HOSE SET
K4008	LARGE O-RING FOR PUMP TUBE (CONSTRUCTION)	K8050	WAND HOLDER & DRIP TRAY SET
K4012	NOZZLE HOLDER (CONSTRUCTION)	K8057	16V BATTERY PACK
K4015	COMPLETE ADJUSTABLE BRASS NOZZLE (VITON)	K8058	16V CHARGER & TRANSFORMER
K4017	PLASTIC SPRAY TIP SET	K8059	603 AIR BOOSTER
K4026	WASHER SET FOR SPRAY GUN	K8060	HANDLE PLUG
K4028	PRESSURE RELIEF VALVE	K8061	AIR LINK
K4033	VITON O-RING SET FOR ADJUSTABLE NOZZLE	K8062	30M SPIRAL HOSE
K4035	O-RING SET FOR PRESSURE RELIEF VALVE	K8065	AIR BOOSTER CHECK VALVE
K4039	O-RING & WASHER SET FOR SPINDLE	K8066	HANDLE PLUG CHECK VALVE
K4047	SILICONE GREASE	K8069	GRIP SET
		K8071	SPRAY GUN A PART SET
		K8072	SPRAY GUN A6

To order parts, please email: info@sprayers-plus.com or scan QR code
For more specifications and information, go to webpage: www.sprayers-plus.com



RETURN INSTRUCTIONS

If it is necessary to return the sprayer for repair, always perform the following tasks before returning the sprayer:

- In an approved containment area, flush chemical residue from the pump, tank and hoses.
- Circulate fresh water through the tank, pump and hoses.
- Indicate the type of chemicals that have been in the sprayer with a label or tag.
- Include complete description of operation problem, such as how sprayer was used, symptoms of malfunction, how many working hours per day, etc.
- Since the sprayer can contain residues of toxic chemicals, these steps are necessary to protect the people who handle return shipments and to help identify issues and solutions.



WARRANTY INFORMATION

Statement of Limited Warranty

Sprayers Plus shall warrant the equipment described in this manual and shall repair or replace parts and components which, under normal operation and wear, in accordance with technical recommendations, show DEFECTS IN MATERIAL OR WORKMANSHIP, based on the following conditions.

Warranty period

1 (one) year from the date of sale to the original purchaser.

Warranty Registration

Please visit: www.sprayers-plus.com/warranty

Sprayers Plus shall honor this warranty, free of charge, if any part or component shows defect in MATERIAL OR WORKMANSHIP, after final analysis at the factory.

This Warranty shall be null and void in case of:

- Misuse of the equipment against specifications in this manual, overwork or accidents.
- Preventive / remedial maintenance performed by unauthorized people or parties.
- Use of parts and components not supplied by Sprayers Plus.
- Modification of the equipment or any characteristic of the original design.

This Warranty shall exclude

- Parts which show wear and tear due to use: spray nozzle, filters, seals, rechargeable battery, hydraulic pump, electronic panel, charger and its cables, agitator lever, belt, UNLESS THEY SHOW DEFECTS IN WORKMANSHIP, ASSEMBLY OR MATERIAL.
- Damages resulting from accidents.
- Transportation or freight of the equipment, parts, and components in case such warranty is not approved.
- Transportation and travel time of technician.

web: www.sprayers-plus.com



email: info@sprayers-plus.com